

UV Type (4Q) Specifications

UV Sensor for SpotOn USB system


Sensor type	4-Quadrant, PSD
Photosensitive area	3mm x3 mm, 100µm gap
Number of elements	4-segment
Package	Metal
Package category	TO-5
Cooling	Non-cooled
Spectral response range	190nm to 1000nm
Peak sensitivity wavelength (typ.)	720 nm
Photosensitivity (typ.)	0.45 A/W



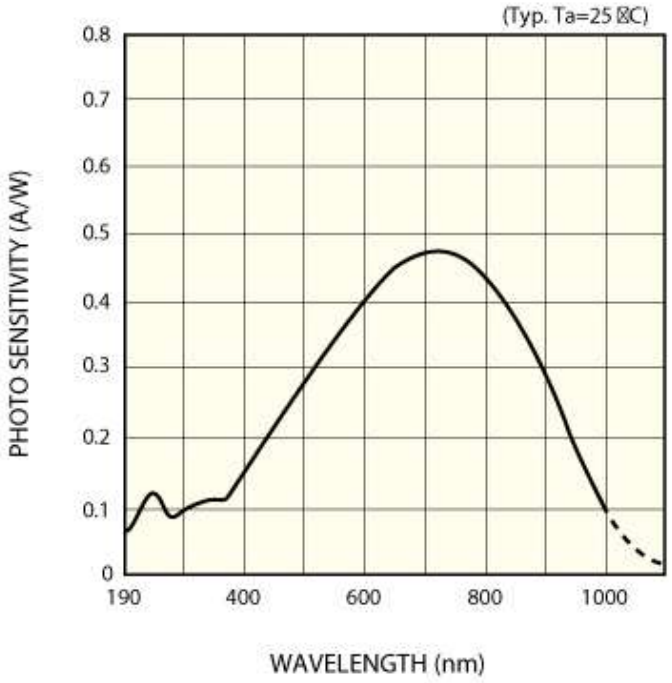



DETAILS OF
PHOTODIODE

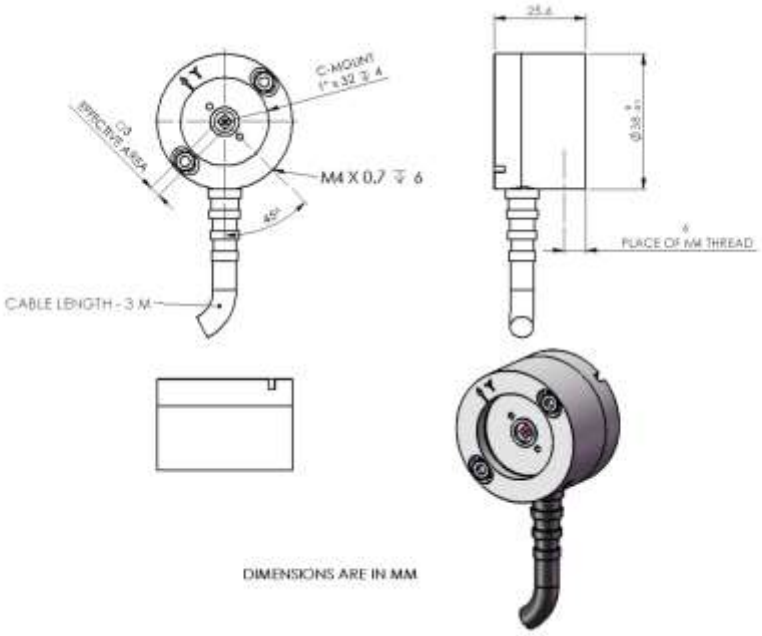

PN: SPOTUSB-4Q-UV